



ServoWeld[™] with Integral Force Sensor

ServoWeld actuator with optional force sensor integrates a piezo-crystal force sensor inside the actuator and carries an amplifier converting force measurements into a voltage output.


Actuator force can be measured in real-time during the welding process.

The design is ideal for adaptive welding of materials with low resistance; i.e. aluminum welding

ENDURANCE TECHNOLOGY A Tolomatic Design Principle

FORCE SENSOR AMPLIFIER OUTPUT

Scaled output 0-10 V up to 24 kN (5,395 lbf)
Force measurement available via 8-pin connector. Optional 5-pin connector is also available
Option to split scaled force output signal to both robot and weld controller

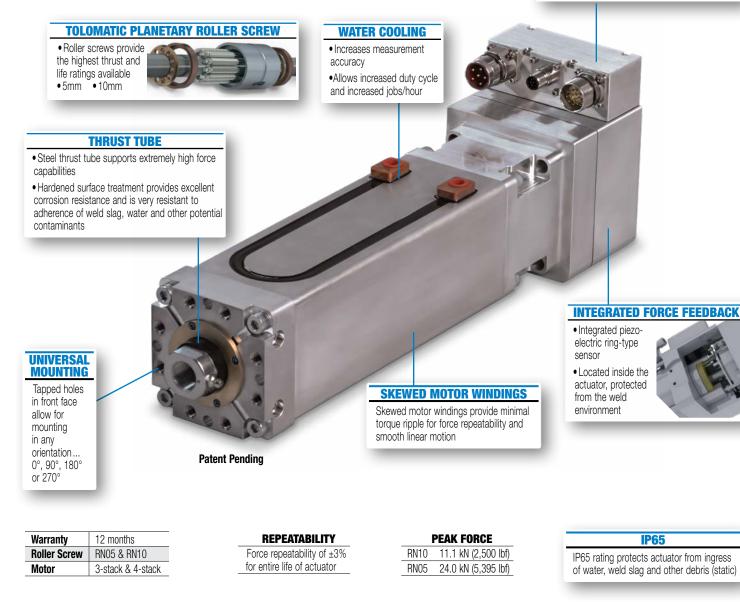







ServoWeld[™] with Integral Force Sensor

ADVANTAGES OF THE SERVOWELD-IFS (INTEGRAL FORCE SENSOR)

- Force calibration good for life of the actuator no recalibration of piezo necessary
- · Sensor and wiring protected in actuator housing away from weld electrodes
- Reliable force measurements
- Excellent force repeatability due to optimized motor architecture
- Ideal for:
 - · Challenging welding applications of multiple sheets with different thicknesses
 - If forging (force stepping) is used during welding process
 - Welding of metals with low resistance; i.e. aluminum
 - Adaptive Welding



OVERVIEW

- Sensor type: Piezo-electric ring-type sensor
- Contained in hermetically-sealed ring housing, integrally mounted in actuator housing
- Scaled output 0 to 10 Volt up to 24 kN (5,395 lbf)
 - Typical scaling for C Guns: 0 to 10V = 12 kN (2,698 lbf)
 - Typical scaling for X Guns: 0 to 10V = 24 kN (5,395 lbf)
- Force measurement available via 8-pin connector. Optional 5-pin connector also available.
- Option to split force output to be sent to both robot and weld timer as scaled output.
- With Water cooling for best measurement results.







$\textbf{ServoWeld}^{\scriptscriptstyle{\mathsf{M}}} \textbf{ with Integral Force Sensor}$

SERVOWELD FORCE FEEDBACK WIRING OPTIONS

Standard 8 Pin Connector

Can be combined with any Robot type

Force Feedback Code:	B2
Loadcell Type:	Piezo
Loadcell Supply Voltage (Nominal):	24V DC

Force Feedback Connector:	
Style:	M12 panel mount
Manufacturer:	Phoenix Contact

Manufacturer P/N	1441561
Clocking:	Key between pins "1" and "2"

Force Feedback Connector Pinout

Pin	Signal	
1	OV GND Sensor	
2	Range	5
3	Reset / Operate Sensor	
4	NC	
5	0-10V Signal Out Sensor	
6	I ² C Clock	
7	I ² C Data	
8	24V DC Sensor	

Optional 5 Pin Connector

Can be combined with any Robot type

Loadcell Type:	Piezo
Loadcell Supply Voltage (Nominal):	24V DC

Force Feedback Connector:	
Style:	M12 panel mount
Manufacturer:	Turck

Manufacturer P/N	FS4.5
Clocking:	Key between pins "1" and "2"

Force Feedback Connector Pinout

Pin	Signal	4
1	24V DC Sensor	5
2	OV GND Sensor	
3	0-10V Signal Out Sensor	I The s
4	Reset / Operate Sensor	
5	NC	2








ServoWeld[™] with Integral Force Sensor

FORCE SENSOR TECHNICAL DATA

Calibrated measuring range:	0 to 26 kN
Sensitivity:	≈ -1.6 pC/N
Linearity:	< +/- 2% Full Scale Output
Temperature range:	- 40 to 120 °C
Insulation resistance:	≥ 1013 Ω
Plug connection:	KIAG 10-32 neg. 1 pole
Degree of protection (with connected cable)	EN60529 IP65
Weight:	0.15 kg

AMPLIFIER CONNECTOR PIN-OUT

- Available in 8-pin M12 male connector standard
- Available in 5-pin connector as an option

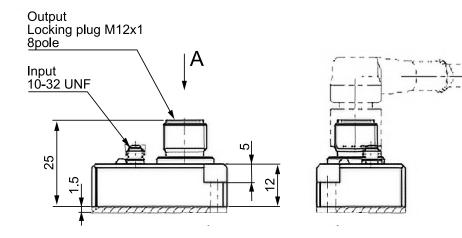



MADE IN U.S.A.

USA - Headquarters Tolomatic Inc.

8800 County Road 116 Hamel, MN 55340, USA Phone: (763) 478-8000 Toll-Free: **1-800-328-2174** sales@tolomatic.com www.tolomatic.com

Tolomatic EXCELLENCE IN MOTION

MEXICO

Centro de Servicio Parque Tecnológico Innovación Int. 23, Lateral Estatal 431, Santiago de Querétaro, El Marqués, México, C.P. 76246 Phone: +1 (763) 478-8000 help@tolomatic.com EUROPE

Tolomatic Europe GmbH Elisabethenstr. 20 65428 Rüsselsheim Germany Phone: +49 6142 17604-0 help@tolomatic.eu www.tolomatic.com/de-de COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV = ISO 9001 = Certified site: Hamel, MN

CHINA

Tolomatic Automation Products (Suzhou) Co. Ltd. No. 60 Chuangye Street, Building 2 Huqiu District, SND Suzhou Jiangsu 215011 - P.R. China Phone: +86 (512) 6750-8506 Tolomatic_China@tolomatic.com

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors

that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information