


ACTUATOR LIFE

How to Estimate for
Ball and Roller Screw
Actuators

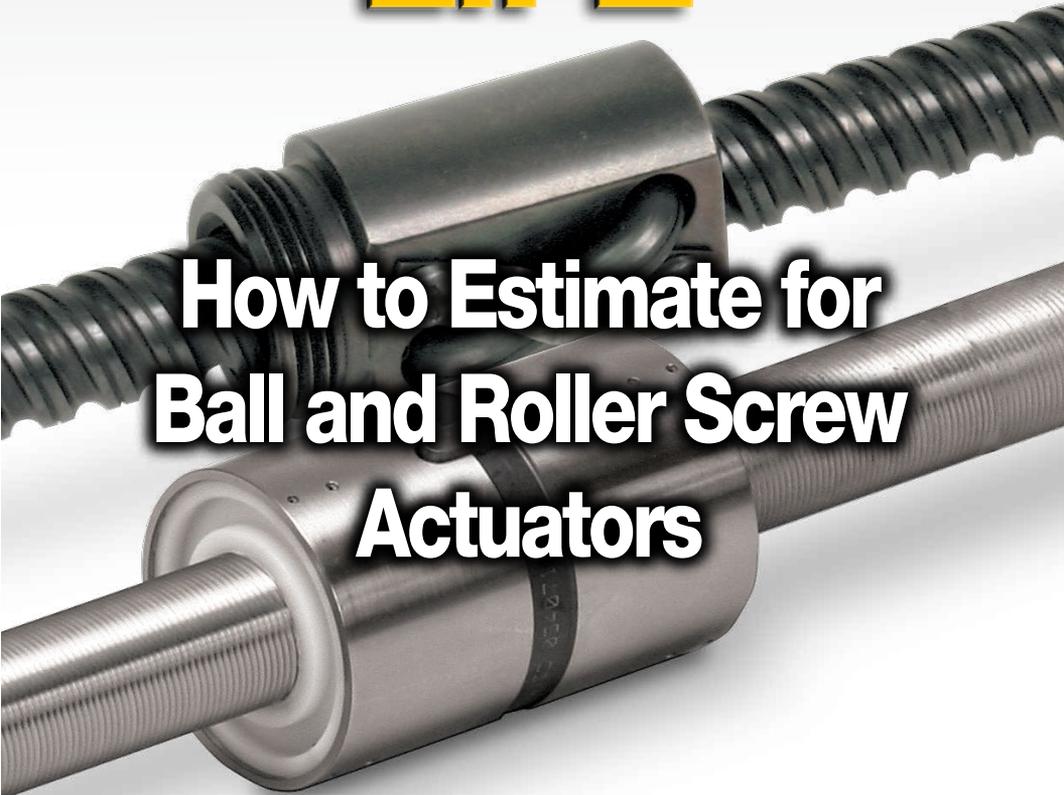

 **Tolomatic**
EXCELLENCE *IN MOTION*®

Contents

Introduction3

Definitions4

How to estimate life (L10) with a constant load6

How to estimate life (L10) with a varying load7

How to calculate equivalent load.8

How to calculate estimated life in time (day, years) .9

How to compare life between two actuators10

Summary.11



3800 County Road 116
Hamel, MN 55340-9360
P: 763-478-8000 • 800-328-2174
F: 763-478-8080
E: info@tolomatic.com
www.tolomatic.com


Introduction

Estimating how long a piece of equipment will last in an application is critical information in the specification process. This step-by-step guide examines how to estimate the life of an electric actuator, utilizing ball or roller screw technology, in applications that require constant or varying (changing) loads. In addition, you will learn how to calculate life in units of time (days, years, etc.) and how to compare the expected life of two different solutions.

Load is just one factor affecting the service life of an actuator. Factors that can negatively affect life or lead to premature failure include incorrect mounting/alignment, lubrication starvation, temperature and other environmental extremes. Consider each of these factors to ensure a long service life and maintenance-free operation for your application.

Footnote: The calculations shown in this guide are theoretical life estimates and not a guarantee of actual actuator life.

Definitions

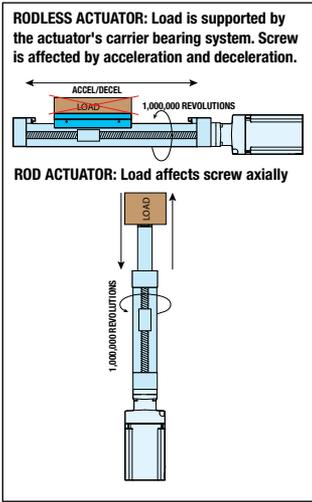


Dynamic Load Rating (DLR)

DLR is a bearing term that represents an applicable constant load (in direction and magnitude) where a ball bearing device will achieve 1,000,000 revolutions (rotations) of rated life.


- Also known as symbol **C**.
- Provided by manufacturers for ball & roller screw combinations.
- Magnitude of the dynamic load rating (DLR) typically depends on the screw diameter, screw lead and number of recirculating rolling elements (balls or rollers) inside the nut that simultaneously carry the load.

NOTE: Screw manufacturers typically publish theoretical DLR numbers for their screws.



Constant Load

A constant load is a load that remains unchanged along the full working cycle

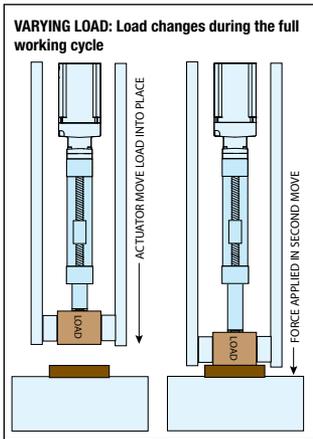


Varying Load and Equivalent Dynamic Load

In the case of a varying load (a load that changes during the working cycle), it is necessary to calculate the equivalent dynamic load or P_e .

Equivalent Dynamic Load or P_e is a dynamic load acting on the screw, which if applied constantly would have the same effect on the screw life as the combined actual loads.

In the case of constant load:
equivalent load = actual load

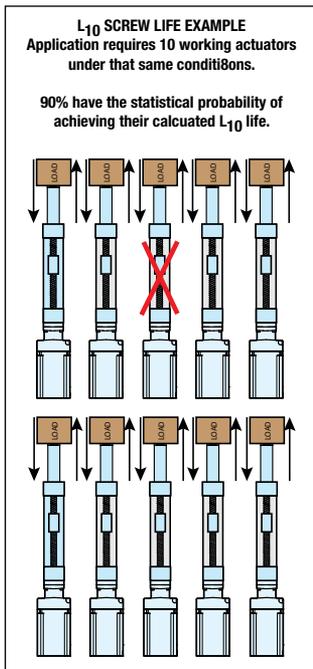

"L₁₀" Life

L₁₀ is a calculation of life at which 10% of the bearings in that application can be expected to have failed due to classical fatigue failure. (Or alternatively, the life at which 90% will still be operating). L₁₀ life for a group of identical screw actuators operating under the same conditions, is a life of such magnitude that 90% of these actuators have the statistical probability to achieve.

- Does not include any other mode of failure like lubrication starvation, incorrect mounting, etc.
- L₁₀ life calculation provides a theoretical life estimate based on a collection of statistics. This is not a guarantee of performance but a guide for expected life.
- Outside the USA, it may be referred to as "B10" life

How to estimate life (L_{10}) with a constant load

EXAMPLE

Estimating Life (L_{10}) with a constant Load

To calculate travel life:

$$C = 10,000 \text{ lbf}$$

$$P_e = 5,000 \text{ lbf}$$

$$\ell = 5 \text{ mm}$$

The underlying formula that defines this value is:

$$L_{10} = \left(\frac{C}{P_e} \right)^3 \cdot \ell \equiv$$

$$L_{10} = \left(\frac{10,000}{5,000} \right)^3 \cdot 5$$

$$= (2)^3 \cdot 5 = 8 \cdot 5$$

$$= 40$$

$$= 40 \text{ million mm}$$

$$(40,000 \text{ m})$$

To estimate life with a constant load the underlying formula that defines this value is:

$$L_{10} = \left(\frac{C}{P_e} \right)^3 \cdot \ell \equiv$$

L_{10} Travel life in millions of units (in or mm), where:

C = Dynamic load rating (lbf) or (N)

P_e = Equivalent load (lbf) or (N)

- If application load is constant across all movements, then:
the equivalent load = actual load
- If application load is varying across movements, then:
an equivalent load must be calculated (see next page)

NOTE: Use same units (lbf or N or kN) as DLR so units cancel each other.

ℓ = Screw lead (in/rev) or (mm/rev)

NOTE: Use desired linear units (in or mm).

How to estimate life (L_{10}) with a varying load

As explained in the definitions on page 5, when a load varies during the working cycle it is necessary to calculate the equivalent dynamic load (P_e). P_e is defined here again as a dynamic load acting on the screw axially and centrally, which if applied constantly would have the same effect on the actual screw life as the combined actual loads.

Use the "*Equivalent Load*" calculation below, when the load is not constant throughout the entire stroke. In cases where there is only minor variation in loading, use greatest load for life calculations.

$$P_e = \sqrt[3]{\frac{L_1(P_1)^3 + L_2(P_2)^3 + L_3(P_3)^3 + L_n(P_n)^3}{L}}$$

Where:

P_e = Equivalent load (lbs) or (N)

P_n = Each increment at different load (lbs) or (N)

L = Total distance traveled per cycle (extend + retract stroke)

$$(L = L_1 + L_2 + L_3 + L_n)$$

L_n = Each increment of stroke (in) or (mm) at different load

Then use the calculated P_e in the life calculation shown previously.

$$L_{10} = \left(\frac{C}{P_e} \right)^3 \cdot \ell \equiv$$

Remember...

C = Dynamic load rating (in) or (mm)

P_e = Equivalent load (lbf) or (N)

ℓ = Screw lead (in/rev) or (mm/rev)

An example of how to calculate a varying load is provided on the following page.

How to estimate life (L_{10}) with a varying load

EXAMPLE

Estimating Life (L_{10}) with a varying loads across each movement

- C (DLR) = 10,000 lbf

- Screw Lead (l) = 5 mm/rev

- Complete Motion Cycle:

- Move +125mm (L1) with 500 lb load (P1)
- Move +25mm (L2) with 5,000 lb load (P2)
- Move -150mm (L3) with 500 lb load (P3)

$$P_e = \sqrt[3]{\frac{L_1(P_1)^3 + L_2(P_2)^3 + L_3(P_3)^3 + L_n(P_n)^3}{L}}$$

Total move = 300mm

$$P_e = \sqrt[3]{\frac{125(500)^3 + 25(5000)^3 + 150(500)^3}{300}}$$

$$P_e = \sqrt[3]{\frac{15,625,000,000 + 3,125,000,000,000 + 18,750,000,000}{300}}$$

$$P_e = \sqrt[3]{10,531,250,000}$$

$$P_e = 2,192 \text{ lbf}$$

NOTE: 2,192 lbf is much less than 5,000 lbf in this simple example.

Use this number to estimate life

$$L_{10} = \left(\frac{C}{P_e}\right)^3 \cdot l =$$

Travel life in millions of units (in) or (mm), where:

C = 10,000 lbf

P_e = 2,192 lbf (Equivalent Load)

l = 5 mm/rev

$$L_{10} = \left(\frac{10,000}{2,192}\right)^3 \cdot 5 = (4.56)^3 \cdot 5 = 94.95 \cdot 5$$

$$= 474.75 = 474.75 \text{ million mm}$$

$$(474,750 \text{ m})$$

NOTE: Over 10 times the travel life over simple application. When varying load is ignored and simplified to 5,000 lbf (to be conservative or to do a quick calculation) the rounding error can be magnitude of the calculated difference can be large and misguide selection of actuators. Be sure to fully understand if the application is constant load or varying load.

How to calculate estimated life in time (days, years)

What do you need?

- L_{10} life calculation in distance
- L Total distance traveled per cycle (extend + retract stroke)
- Number of cycles per minute (**CpM**)
- Number of hours operated per day (**HpD**)
- Number of days of operation per year (**DpY**)

$$\text{Life Estimate in Time (days)} = \frac{\left(\frac{L_{10} \text{ life}}{L} \right)}{(\text{CpM}) \cdot 60 \text{ min/hr} \cdot (\text{HpD})}$$

$$\text{Life Estimate in Time (years)} = \frac{\left(\frac{L_{10} \text{ life}}{L} \right)}{(\text{CpM}) \cdot 60 \text{ min/hr} \cdot (\text{HpD}) \cdot (\text{DpY})}$$

EXAMPLE

Calculating estimated life in years

Varying Load Application from previous example (with $P_e = 2192$ lbf)

L_{10} life calculation in distance = 474,731 m

Total distance traveled in one motion cycle (L) = 300 mm or 0.3m

Customer inputs on how actuator will be used in service

Number of cycles per minute (**CpM**) = 10

Number of hours operated per day (**HpD**) = 2 shifts or 16 hours

Number of days of operation per year (**DpY**) = 7 days/week minus holidays
= 350

$$\text{Life estimate in time (years)} = \frac{\left(\frac{L_{10} \text{ life}}{L} \right)}{(\text{CpM}) \cdot 60 \text{ min/hr} \cdot (\text{HpD}) \cdot (\text{DpY})}$$

$$\text{Life estimate in time (years)} = \frac{\left(\frac{474,750}{0.3} \right)}{(10) \cdot 60 \text{ min/hr} \cdot (16) \cdot (350)}$$

$$\frac{(1,582,500)}{(3,360,000)} = 0.472 \text{ years}$$

How to compare life between two actuators

Use the formula below to compare actuator products.

$$\text{Life comparison of product A vs. product B} = \left(\frac{\text{DLR A}}{\text{DLR B}} \right)^3 \cdot \left(\frac{\text{Screw Lead A}}{\text{Screw Lead B}} \right)$$

NOTE: Use higher DLR as DLR A. This formula can be used to compare: ball vs. roller, size 1 vs. size 2, or manufacturer A vs. manufacturer B.

EXAMPLE

Comparing life between two actuators with same screw leads

- DLR A (8000 lbf); DLR B (4000 lbf); both have 5 mm lead

$$\text{- A vs B} \left(\frac{8,000}{4,000} \right)^3 \cdot \left(\frac{5}{5} \right) = (2)^3 \cdot 1 = 8$$

This means product A has an estimated 8 times the life of product B

Comparing life between two actuators with different screw leads

- DLR A (8000 lbf) w/ 5 mm lead; DLR B (4000 lbf) with 10 mm lead

$$\text{- A vs B} \left(\frac{8,000}{4,000} \right)^3 \cdot \left(\frac{5}{10} \right) = (2)^3 \cdot 0.5 = 4$$

This means product A has an estimated 4 times the life of product B

Why? DLRs are based off 1M revs; Life must be normalized for different leads!

Summary



When determining the life of an actuator, inside a machine application, it is important to evaluate the effects of loading on the screw. Calculating for constant loads requires a different formula than calculating for varying loads. Besides load, other factors affect how the screw performs inside the actuator, including manufacturing methods, actuator design, lubrication, velocity, temperature, wear, corrosion, contamination and other dynamic elements such as misalignment and vibrations.

The calculations contained in this guide will give you a general estimation of actuator life based on statistical data. To ensure long service life of your application, consider these other factors, in addition to load, in your specification analysis.

9900-4411_01

201710251353



USA

3800 County Road 116
Hamel, MN 55340, USA

Phone: (763) 478-8000

Fax: (763) 478-8080

Toll-Free: **1-800-328-2174**

sales@tolomatic.com

www.tolomatic.com

EUROPE

Tolomatic Europe GmbH

Zeilweg 42

60439 Frankfurt am Main

Germany

Phone: +49 69-2045-7837

EuropeSales@tolomatic.com

CHINA

**Tolomatic Automation Products
(Suzhou) Co. Ltd.**

(ServoWeld® inquiries only)

No. 60 Chuangye Street, Building 2

Huqiu District, SND Suzhou

Jiangsu 215011 - P.R. China

Phone: +86 (512) 6750-8506

Fax: +86 (512) 6750-8507

ServoWeldChina@tolomatic.com

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in



this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information